



Data Sheet

Operational Amplifier, Dual, 2 Amplifier, 500 kHz, 0.15 V/ μ s, \pm 3V to \pm 18V, DIP, 8 Pins

Manufacturers Analog Devices, Inc

Package/Case PDIP-8

Product Type Amplifier ICs

RoHS Rohs

Lifecycle



Images are for reference only

Please submit RFQ for OP200GPZ or Email to us: sales@ovaga.com We will contact you in 12 hours.

RFO

General Description

The OP200 is the first monolithic dual operational amplifier to offer OP77 type precision performance. Available in the industry standard 8-lead pinout, the OP200 combines precision performance with the space and cost savings offered by a dual amplifier.

The OP200 features an extremely low input offset voltage of less than 75 μ V with a drift below 0.5 μ V/°C, guaranteed over the full military temperature range. Open-loop gain of the OP200 exceeds 5,000,000 into a 10 k Ω load; input bias current is under 2 nA; CMRR is over 120 dB; and PSRR is below 1.8 μ V/V. On-chip Zener zap trimming is used to achieve the extremely low input offset voltage of the OP200 and eliminates the need for offset pulling.

Power consumption of the OP200 is low, with each amplifier drawing less than 725 μ A of supply current. The total current drawn by the dual OP200 is less than one-half that of a single OP07, yet the OP200 offers significant improvements over this industry-standard op amp. The voltage noise density of the OP200, 11 nV/ \sqrt{Hz} at 1 kHz, is half that of most competitive devices.

The OP200 is an ideal choice for applications requiring multiple precision op amps and where low power consumption is critical.

For a quad precision op amp, see the OP400.

Features

Low input offset voltage: 75 μV maximum

Low offset voltage drift, over -55° C < TA $< +125^{\circ}$ C

 $0.5~\mu V/^{\circ} C$ maximum


Low supply current (per amplifier): 725 μA maximum


High open-loop gain: 5000 V/mV minimum

Low input bias current: 2 nA maximum

Low noise voltage density: 11 nV/ $\sqrt{\text{Hz}}$ at 1 kHz

Stable with large capacitive loads: 10 nF typical

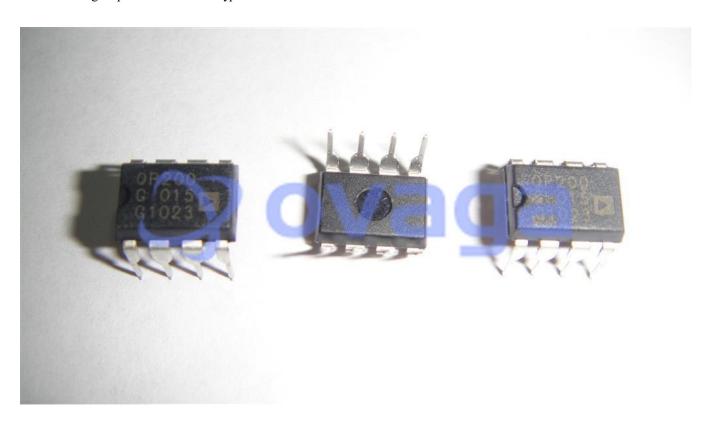

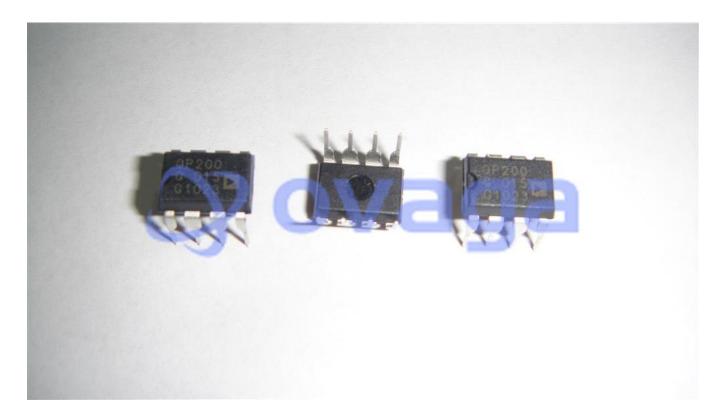

Related Products



OP213F

Analog Devices, Inc SMD/DIP-8/SOP-8



OP27GP

Analog Devices, Inc PDIP-8



OP462GSZ

Analog Devices, Inc SOIC-14



OP467GPZ

Analog Devices, Inc PDIP-14



OP42AZ

Analog Devices, Inc CDIP-8



OP37GS

Analog Devices, Inc SOIC-8



OP2177ARM

Analog Devices, Inc MSOP8



OP400GPZ

Analog Devices, Inc PDIP-14