



Data Sheet

Dual Low Side MOSFET Power Driver, 1.5A, $4.5 \rightarrow 18 \text{ V } 8\text{-Pin}$, SOIC

Manufacturers <u>Microchip Technology, Inc</u>

Package/Case SOIC-8

Product Type Power Management ICs

RoHS Rohs

Lifecycle



Images are for reference only

Please submit RFQ for TC4426AEOA or Email to us: sales@ovaga.com We will contact you in 12 hours.

RFO

General Description

The TC4426A/4427A/4428A are improved versions of the earlier TC426/427/428 family of buffer/drivers (with which they are pin compatible). They will not latch up under any conditions within their power and voltage ratings. They are not subject to damage when up to 5V of noise spiking (of either polarity) occurs on the ground pin. They can accept, without damage or logic upset, up to 500mA of reverse current (of either polarity) being forced back into their outputs. All terminals are fully protected against up to 4kV of electrostatic discharge. As MOSFET drivers, the TC4426A/4427A/4428A can easily switch 1000pF gate capacitances in under 30nsec, and provide low enough impedances in both the ON and OFF states to ensure the MOSFETs intended state will not be affected, even by large transients.

Features

Wide Operating Range: 4.5V to 18V

High Capacitive Load Drive Capability: 1000pF in 25nsec

Short Delay Times: <30nsec Typ.

Matched Rise, Fall and Delay Times

Low Supply Current

With Logic '1' Input: 1mA

With Logic '0' Input: 100µA


Low Output Impedance: 7Ω Typ.

Latch-Up Protected: Will Withstand >0.5A Reverse Current

Input Will Withstand Negative Inputs Up to 5V

ESD Protected: 4kV

Pinouts Same as TC426/27/28

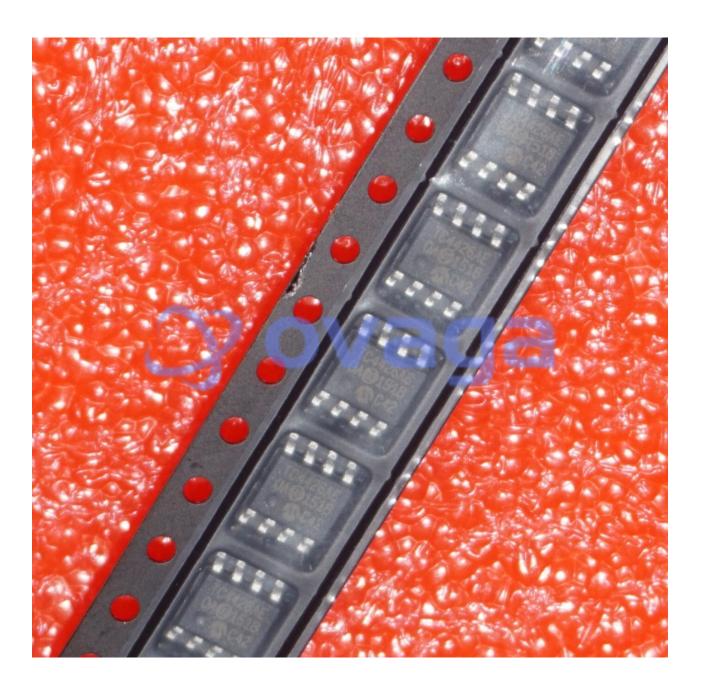



Related Products



TC7662BEOA

Microchip Technology, Inc SOIC-8



TC4428EOA

Microchip Technology, Inc SOIC-8



TC7107ACKW

Microchip Technology, Inc MQFP-44



TC4420EOA

Microchip Technology, Inc SOIC-8



TC4426EPA

Microchip Technology, Inc PDIP-8



TC1015-1.8VCT713

Microchip Technology, Inc SOT-23-5



TC7662BCOA713

Microchip Technology, Inc
SOIC-8



TC4421EPA

Microchip Technology, Inc
PDIP-8