


LTM8020EV#PBF

Data Sheet

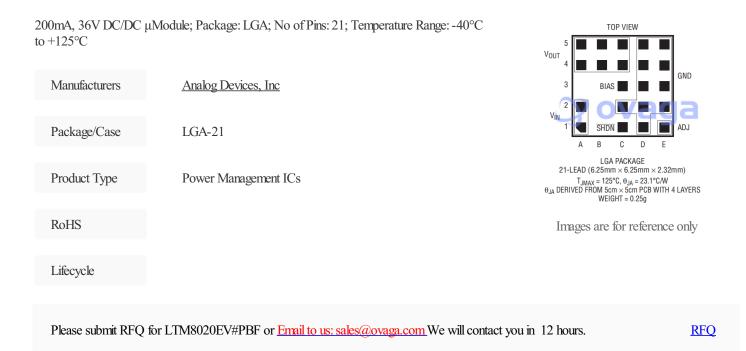

General Description

The LTM8020 is a complete 200mA, DC/DC step-down power supply. Included in the package are the switching controller, power switches, inductor, and all support components. Operating over an input voltage range of 4V to 36V, the LTM8020 supports an output voltage range of 1.25V to 5V, set by a single resistor. Only bulk capacitors are needed to finish the design. The LTM8020 meets the radiated emissions requirements of EN55022. Conducted emission requirements can be met by adding standard filter components.

The low profile (2.32mm) tiny package enables utilization of unused space on the bottom of PC boards for high density point of load regulation.

The LTM8020 is packaged in a thermally enhanced, compact (6.25mm × 6.25mm) and low profile (2.32mm) over-molded land grid array (LGA) package suitable for automated assembly by standard surface mount equipment. The LTM8020 is Pb-free and RoHS compliant.

Features

Complete Step-Down Switch Mode Power Supply

Wide Input Voltage Range: 4V to 36V


1.25V to 5V Output Voltage

- EN55022 Class B Compliant
- 200mA Output Current

Current Mode Control

Pb-Free (e4) RoHS Compliant Package with Gold Pad Finish


Tiny, Low Profile (6.25mm \times 6.25mm \times 2.32mm) Surface Mount LGA Package

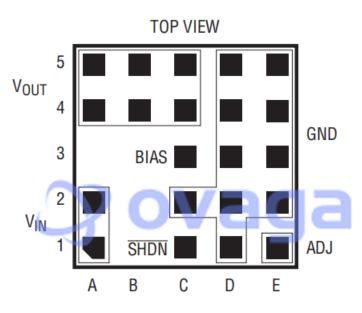



Application

Automotive Battery Regulation Power for Portable Products Distributed Supply Regulation Industrial Supplies Wall Transformer Regulation

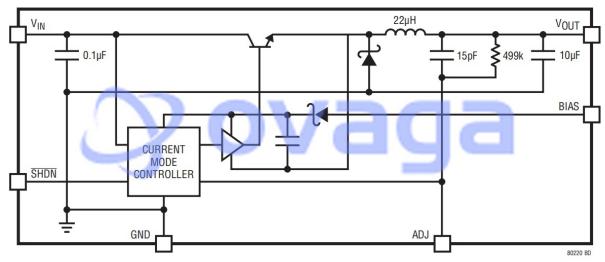

Related Products



LT3763EFE Analog Devices, Inc TSSOP28

LTC4417IUF

) Billing

Analog Devices, Inc QFN-24



LTC1966CMS8#PBF Analog Devices, Inc MSOP-8P



LTM8045EY#PBF Analog Devices, Inc

BGA40









Analog Devices, Inc 28-WFQFN

LT1038CK

TO-3

Analog Devices, Inc

LTC3440EMS

MSOP10

10MSOP

Analog Devices, Inc

LTC2990IMS#PBF

Analog Devices, Inc

LT4295IUFD#PBF

