


## USB 3.0 Host Controller

Manufacturers	<a href="#">Renesas Technology Corp</a>
Package/Case	
Product Type	Interface ICs
RoHS	
Lifecycle	

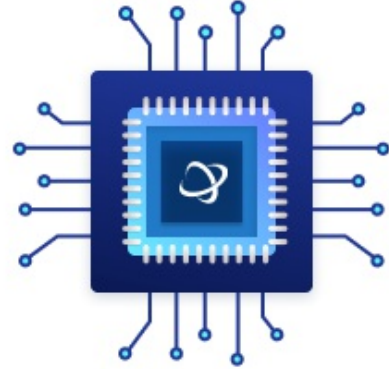

Images are for reference only

Please submit RFQ for UPD720202K8-711-BAA-A or [Email to us: sales@ovaga.com](mailto:sales@ovaga.com) We will contact you in 12 hours.

[RFQ](#)

## General Description

### Features

System I/F: PCIe Gen2 x 1 Lane

USB ports: 2 ports (SS/HS/FS/LS)

Comply spec to:

PCIe 2.0 Base Spec

USB 3.0 rev1.0 (USB-IF certified: Test>

Intel xHCI rev1.0

V

DD

Clock: 24MHz Xtal clock input

Package: 48-pin QFN (7mm x 7mm, 0.5mm ball pitch)

Ta: 0~85 °C (μPD720202K8-701-BAA-A)

Ta:-40~85 °C (μPD720202K8-711-BAA-A)

## Related Products




### [UPD720202K8-701-BAA-A](#)

Renesas Technology Corp  
QFN-48




### [UPD720200AF1-DAP-A](#)

Renesas Technology Corp  
FBGA-176



### [UPD720115K8-711-BAK-A](#)

Renesas Technology Corp




### [UPD720115K8-611-BAK-A](#)

Renesas Technology Corp




### [UPD720114GA-YEU-AT](#)

Renesas Technology Corp  
TQFP-48



### [UPD720211K8-711-BAL-A](#)

Renesas Technology Corp



### [UPD720211K8-611-BAL-A](#)

Renesas Technology Corp



### [ISL83491IBZ](#)

Renesas Technology Corp  
SOIC-14