


3.0V to 5.5V, Low-Power, up to 1Mbps, True RS-232 Transceivers Using Four 0.1 μ F External Capacitors

Manufacturers	Analog Devices, Inc
Package/Case	SO-16
Product Type	Interface ICs
RoHS	
Lifecycle	

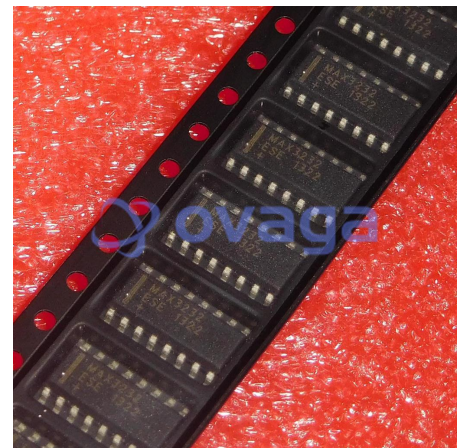

Images are for reference only

Please submit RFQ for MAX3232ESE+T or [Email to us: sales@ovaga.com](mailto:sales@ovaga.com) We will contact you in 12 hours.

[RFQ](#)

General Description


MAX3232ESE+T is a type of integrated circuit (IC) that is commonly used as a level translator or line driver/receiver for RS-232 serial communication. It is produced by Maxim Integrated, a semiconductor company, and is part of their MAX3232 series.

Features

- Single chip RS-232 transmitter/receiver
- Operates from a single 3V to 5.5V power supply
- Guarantees a minimum data rate of 120 kbps
- Has a low-power shutdown mode
- Meets EIA/TIA-232E and V.28/V.24 specifications

Application

- Industrial control systems
- Point-of-sale terminals
- Networking equipment
- Personal computers
- Portable instruments

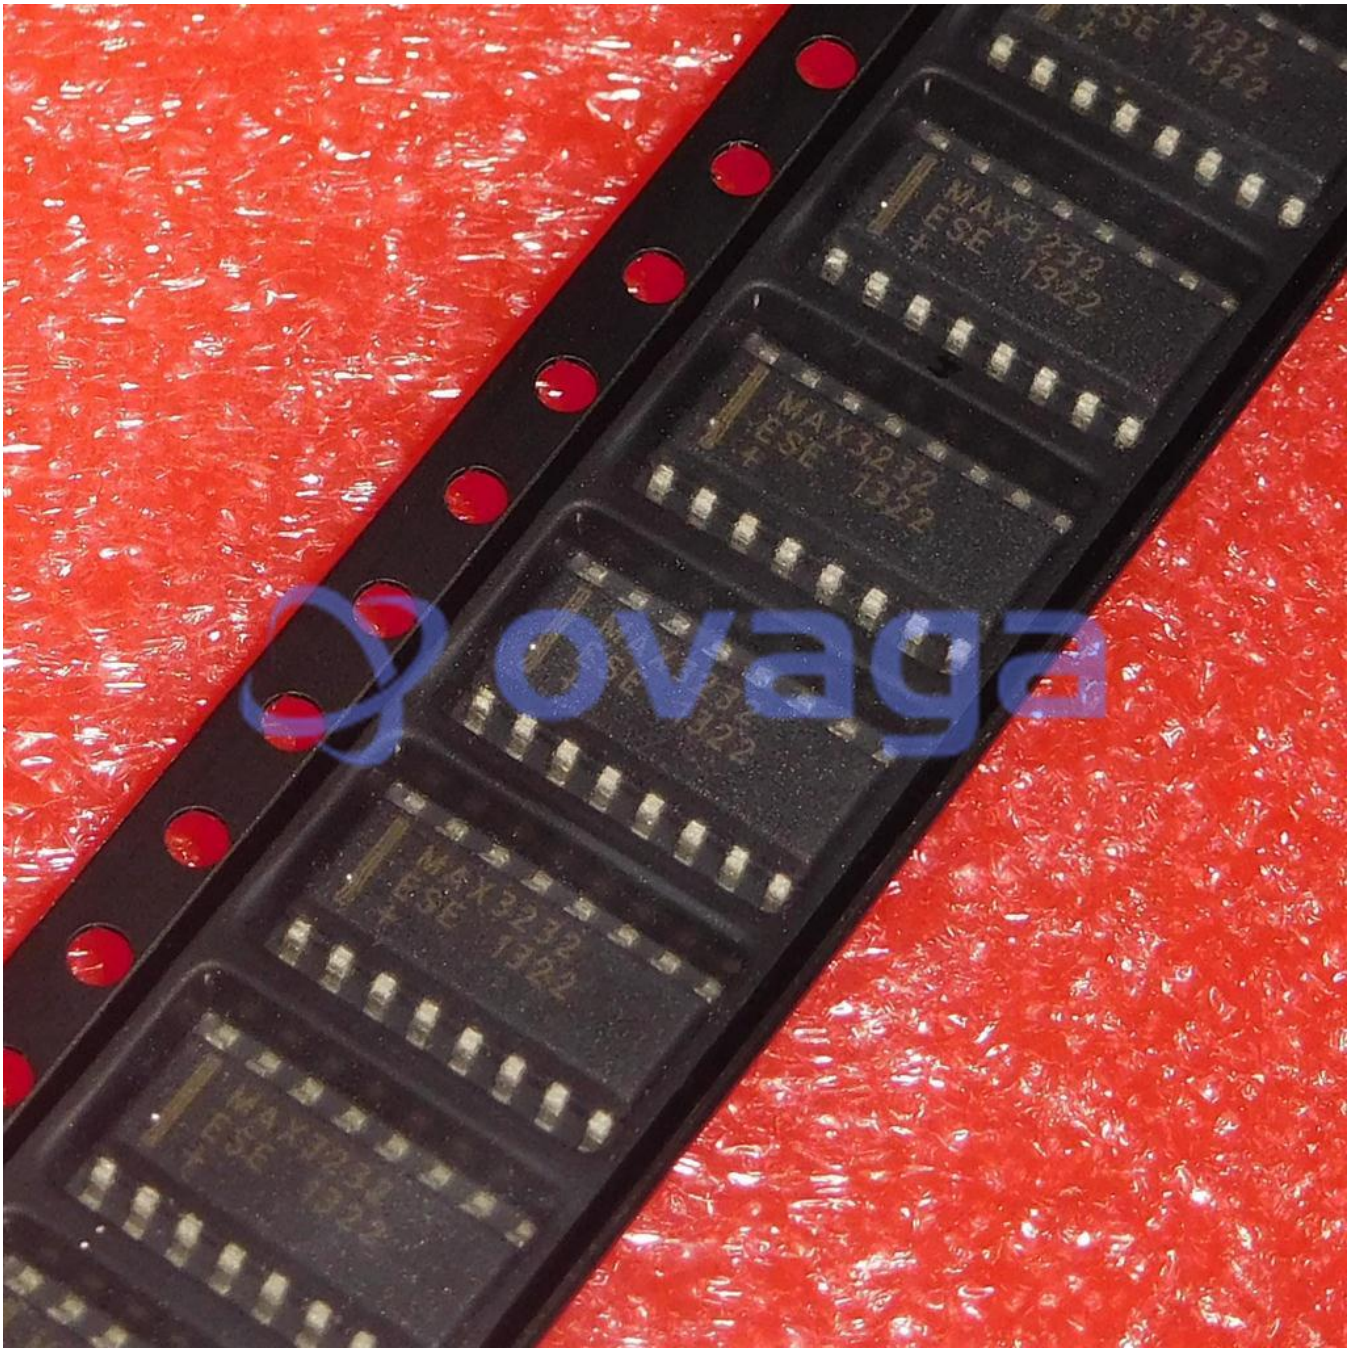

Related Products




[MAX3232EEUE](#)

Analog Devices, Inc
TSSOP-16



[MAX4544EUT+T](#)

Analog Devices, Inc
SOT-23-6



[MAX202CSE](#)

Analog Devices, Inc
SOP-16




[MAX485ECPA](#)

Analog Devices, Inc
DIP-8



[MAX3221EEUE](#)

Analog Devices, Inc
TSSOP-16



[MAX3223EEUE](#)

Analog Devices, Inc
TSSOP-16



[MAX490MJA](#)

Analog Devices, Inc
CDIP-8



[MAX3232EUE](#)

Analog Devices, Inc
TSSOP-16