🔉 ovaga

LTM8022MPV#PBF

SHARE RT ADJ

GND (BANK 3)

Data Sheet

Step Down DC-DC Switching Regulator, Adjustable, 0.8 10 V 50-Pin, LGA

| Manufacturers | Analog Devices, Inc | 6 S S S S S S S S S S S S S S S S S S S |
|---------------|----------------------|--|
| Package/Case | LGA-50 | |
| Product Type | Power Management ICs | A B C D E F G H LGA PACKAGE 50-LEAD (11.25mm > 9mm > 2.82mm) T_JANCK 125C ⁴ , 6pt = 2.47CM, 4C(200700, 9 = 200°CM, 4(2)CTO = 25.17C/CM, 4(3)CAGAD = 18 ⁻¹ CCM, 4(2)CTO = 25.17C/CM, 4(3)CAGAD = 18 ⁻¹ CCM, 4(2)CTO = 25.17C/CM, 4(3)CAGAD = 18 ⁻¹ CCM, 4(2)CTO = 25.17C/CM, 4(3)CAGAD = 18 ⁻¹ CCM, 4(3)CTO = 25.17C/CM, 4(3)CTO = 25.17C/CM, 4(3)CTO = 25.17C/CM, 4(|
| RoHS | | WEIGHT = 0.93g |
| Lifecycle | | Images are for reference only |
| | | |

Please submit RFQ for LTM8022MPV#PBF or Email to us: sales@ovaga.com We will contact you in 12 hours.

<u>RFQ</u>

General Description

The LTM8022 is a complete 1A, DC/DC μ Module (power module) step-down regulator. Included in the package are the switching controller, power switches, inductor, and all support components. Operating over an input voltage range of 3.6V to 36V, the LTM8022 supports an output voltage range of 0.8V to 10V, and a switching frequency range of 200kHz to 2.4MHz, each set by a single resistor. Only the bulk input and output filter capacitors are needed to finish the design.


The low profile package (2.82mm) enables utilization of unused space on the bottom of PC boards for high density point of load regulation.


The LTM8022 is packaged in a thermally enhanced, compact (11.25mm \times 9mm) and low profile (2.82mm) overmolded land grid array (LGA) package suitable for automated assembly by standard surface mount equipment. The LTM8022 is RoHS compliant.

| Features | Application |
|--|-------------------------------|
| Complete Step-Down Switch Mode Power Supply | Automotive Battery Regulation |
| Wide Input Voltage Range: 3.6V to 36V | Power for Portable Products |
| 0.8V to 10V Output Voltage | Distributed Supply Regulation |
| 1A Output Current | Industrial Supplies |
| Adjustable Switching Frequency: 200kHz to 2.4MHz | Wall Transformer Regulation |
| Current Mode Control | |
| Programmable Soft-Start | |

Tiny, Low Profile (11.25mm × 9mm × 2.82mm) Surface Mount LGA Package

Ovaga Technologies Limited

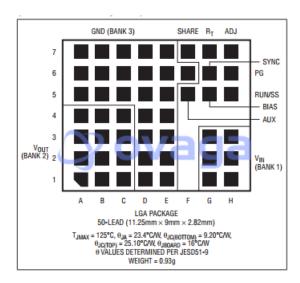

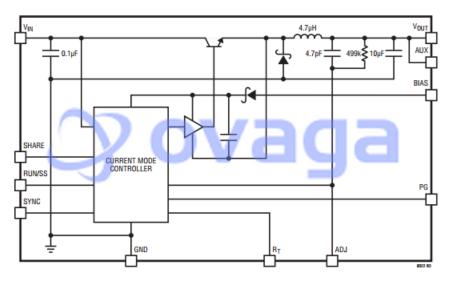

Related Products



LT3763EFE

Analog Devices, Inc TSSOP28



Analog Devices, Inc QFN-24

LTC4417IUF







LTM8045EY#PBF Analog Devices, Inc BGA40









LT1038CK

Analog Devices, Inc TO-3

LTC3440EMS

Analog Devices, Inc MSOP10

LTC2990IMS#PBF

Analog Devices, Inc 10MSOP

LT4295IUFD#PBF

Analog Devices, Inc 28-WFQFN